

- 6 -

REMARKS

The Examiner has objected to the drawings. Amendments have been made hereinabove to the specification, in order to avoid such objections. Specifically, five drawings numbered as Figures 7 to 11 relating to the features of claims 30, 31, 34, 37 and 40 respectively, have been added to the specification. Moreover, the page numbering of the drawings as filed has been amended to bring them into consistency with the additional drawings, and the relevant parts of the description have been amended to refer to the additional drawings. Such amendments conform the specification to the drawings (and vice-versa), as originally filed. Thus, no new matter has been added.

The Examiner has objected to the specification. Applicant asserts that such objection is avoided in view of the replacement specification provided herewith.

The Examiner has rejected Claim 40 under 35 U.S.C. 112, first paragraph, as failing to comply with the written requirement. Specifically, the Examiner has stated that "an outermost layer having an inner periphery longer than the outer periphery of the layer adjacent thereto" is not enabled. Applicant respectfully disagrees.

It is submitted that it would be clear to a person skilled in the art from the wording of the claim alone how the signal transmitting cable could be arranged. In particular, it would be clear that the layer adjacent the outermost layer referred to in Claim 40 could be the first layer in the case where the cable does not comprise a second layer, or alternatively could be the second layer in the case where the cable comprises a second layer in addition to a first layer.

Thus, applicant respectfully asserts that it would be clear to a person skilled in the art, from the wording of the claim alone, that in having an outermost layer with an inner periphery longer than the outer periphery of the layer adjacent thereto, this could for example, enable the removal of the outermost layer by sliding, since the outermost layer would be loose, or there would be a gap between the outermost layer and the layer

- 7 -

adjacent thereto. It is therefore submitted that the claim, as it stands, is sufficiently clear enough for a person skilled in the art to understand the meaning of the claim, and that no amendment to the claim in this regard is required.


The Examiner has rejected Claims 28-40 under 35 U.S.C. 112, second paragraph, as being indefinite. Applicant asserts that the Examiner's objection to Claim 28 is avoided due to amendments made to said claim to refer to "the first signal transmitting members of the first signal transmitting portion." Further, Claim 28 has been amended to specify a technique "wherein for each said row containing a plurality of said members, said members are arranged such that neighbouring members of said row are in touching contact with each other." In view of this, it is submitted that amendment to specify "said row" is clearer than the amendment requested by the Examiner, since the claim already makes it clear that the neighbouring members of each said row are in touching contact with each other. Additionally, in response to the Examiner's rejection that Claim 40 is unclear and causes confusion, applicant respectfully asserts that this rejection has already been addressed above in relation to enablement.

The Examiner has rejected Claims 28, 32, 36, 40, and 41 under 35 U.S.C. 102(b) as being anticipated by Sano et al. (U.S. Patent No. 5,109,456). Applicant respectfully disagrees with such rejection, especially in view of the amendments made hereinabove to each of the independent claims

With respect to the independent claims, the Examiner has relied on the following excerpt from Sano to make a prior art showing of applicant's claimed "first signal transmitting portion including a plurality of elongate, flexible first signal transmitting members, wherein the first signal transmitting members of the first signal transmitting portion are surrounded by a first layer of resin material curable by means of radiation such that only the outermost signal transmitting members are in contact with said first layer, and said first signal transmitting members are arranged to form at least three rows, wherein for each said row containing a plurality of said members, said members are arranged such that neighbouring members of said row are in touching contact with each

- 8 -

other, each recess formed by neighbouring members of a first said row facing towards a second said row accommodates a respective member of said second row, and said first layer is in touching contact with substantially all of the outward facing surface of the first signal transmitting portion" (see this or similar, but not necessarily identical language in the independent claims).

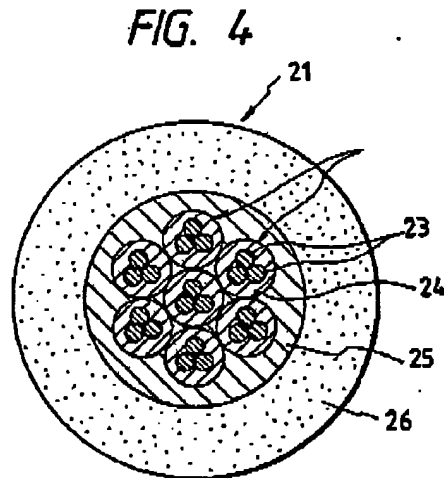

(Sano, Figure 4)

"FIG. 4 shows an optical fiber unit 21 of a third embodiment of the present invention. The optical fiber unit 21 is composed of seven sub-units 22 each constituted by three optical fibers (multi-mode glass optical fibers) 23 gathered and coated with a primary coating (nylon) 24. The sub-units 22 are arranged so that one central sub-unit is surrounded by six other sub-units, while the six outer sub-units are twisted. A secondary coating (ultraviolet setting resin) 25 is applied on the seven sub-units 22, and a porous layer (foamed polyethylene) 26 is applied on the secondary coating 25. The optical fiber unit 21 was manufactured so that the diameter of the primary coating 24 was 0.5 mm.phi., the diameter of the secondary coating 25 was 2.7 mm.phi., and the outer diameter of the optical fiber unit 11 was 4.2 mm.phi.." (Sano, Col. 5, lines 29-43, not specifically cited - emphasis added)

US 5,109,456 (US'456) (see Figure 4) discloses an optical fibre unit comprising seven signal transmitting members in the form of sub-units 22, each comprising three optical fibres 34 coated with a primary coating 24. The sub-units themselves are arranged into three rows, and are surrounded by a secondary coating 25 made from UV setting resin.

- 9 -

The claimed invention as defined by Claims 28 and 41 differs from the cable disclosed in US'456 in that, in the cable of the claimed invention, only the outermost signal transmitting members are in contact with the first layer of resin material curable by means of radiation. Conversely, in US'456, the secondary coating 25 additionally fills the interstices between the innermost signal transmitting members, as can be clearly seen from Figure 4. It is therefore submitted that the claims are *novel* over US'456.

As a result of this difference, the signal transmitting cable of the claimed invention has the optional advantage that the cable is provided with sufficient stiffness whilst still allowing sufficient axial sliding of the optical fibres relative to each other in order to minimise the application of stress to the optical fibres when the cable is bent. A further optional benefit of leaving the internal interstices free from any radiation curable resin is that UV light is typically used to cure such materials; if the internal interstices include radiation curable resin, then the UV light may not penetrate the internal interstices, particularly in the case of arrangements in which there are a large number of fibres. Partially cured or uncured resin is detrimental to the long-term life of the optical fibres.

The technical problem associated with US'456 can therefore be seen to be the provision of a signal transmitting cable which minimises stress to the optical fibres in the event that the cable is bent, and which does not result in partially cured or uncured resin accumulating in the interstices.

None of the prior art cited by the Examiner in the Office Action, namely US 4,892,442, US 4,523,804 and US 6,801,696, discloses a signal transmitting cable wherein only the outermost signal transmitting members are in contact with the first layer of resin material curable by means of radiation. It is therefore submitted that a person skilled in the art, in attempting to solve the problem associated with US'456, would find no solution in any of the prior art.

It is therefore submitted that a person skilled in the art could not combine US'456 with any of the prior art to arrive at the claimed invention as defined by Claims 28 and 41, and that the claimed invention is thus *unobvious*.

- 10 -

The Examiner is reminded that a claim is anticipated only if each and every element as set forth in the claim is found, either expressly or inherently described in a single prior art reference. *Verdegaal Bros. v. Union Oil Co. Of California*, 814 F.2d 628, 631, 2 USPQ2d 1051, 1053 (Fed. Cir. 1987). Moreover, the identical invention must be shown in as complete detail as contained in the claim. *Richardson v. Suzuki Motor Co.* 868 F.2d 1226, 1236, 9USPQ2d 1913, 1920 (Fed. Cir. 1989). The elements must be arranged as required by the claim.

This criterion has simply not been met by the above reference, as noted above. A notice of allowance or specific prior art showing of each of the foregoing claim elements, in combination with the remaining claimed features, is respectfully

Thus, all of the independent claims are deemed allowable. Moreover, the remaining dependent claims are further deemed allowable, in view of their dependence on such independent claims.

In the event a telephone conversation would expedite the prosecution of this application, the Examiner may reach the undersigned at (408) 505-5100. The Commissioner is authorized to charge any additional fees or credit any overpayment to Deposit Account No. 50-1351 (Order No. UDL1P017).

Respectfully submitted,  
Zilka-Kotab, PC.

Kevin J. Zilka  
Registration No. 41,429

P.O. Box 721120  
San Jose, CA 95172-1120  
408-505-5100

-1-

**SIGNAL TRANSMITTING CABLE****RELATED APPLICATION(S)**

The present application claims the priority of a United Kingdom patent application filed August 10, 2002 under application number 0218624.5, United Kingdom patent application filed September 26, 2002 under application number 0222256.0, and United Kingdom patent application filed June 6, 2003 under application number 0313017.6, all of which are incorporated by reference.

**FIELD OF THE INVENTION**

The present invention relates to signal transmitting cables, and relates particularly, but not exclusively, to optical fibre signal transmitting cables.

**BACKGROUND OF THE INVENTION**

Optical fibres have traditionally been installed into underground ducts by attaching a pulling member to one end of the cable, and winching the cable into the duct. As a result, such cables were large and heavily reinforced to protect the relatively delicate optical fibre elements from damage during installation.

Traditional cables were constructed by first manufacturing sub-assemblies comprising tubes manufactured from thermoplastic materials and containing typically twelve fibre optic elements. A number of these tubes were then assembled together by stranding them around a central strength member. The stranding process, and the fact that the tube is large relative to the space occupied by the fibre optic elements, means that all fibres experience the same strain when the cable is bent during installation, and the loose tube construction allows the fibres to move and accommodate the strain, resulting in minimal signal losses.

**MARKED UP COPY**

-2-

More recent techniques for cable installation involve blowing the cable into a duct by means of compressed air, for example as described in EP 0108590. This blowing process distributes the installation force along the entire length of the cable within the duct, as a result of which the installation force at the leading end of the cable can be reduced, and much of the reinforcement can therefore be removed from the cable. This provides significant advantages, since there is an increasing requirement for cables to become more compact, primarily because city networks are congested and providing new underground ducts in cities is expensive and involves substantial disruption.

Installation of cables by blowing involves both the use of fluid drag operating on the sheath of the cable, and a pushing force, usually generated by drive rollers or a caterpillar pushing device which forms part of the blowing equipment. At the initial stages of installation, there is very little cable installed in the tube, and the effect of fluid drag is therefore small compared to the pushing effect. As more of the cable is installed, the installation force derived from the fluid drag becomes more significant.

It is therefore desirable for cables designed for installation by blowing to have adequate stiffness to facilitate the initial pushing requirement. In the case of cables constructed from sub-assemblies, the fibres are loosely contained in an outer sheath of the sub-assembly. Because the individual fibres are not constrained, they do not provide the cable with sufficient stiffness, and it is therefore desirable that the cable be constructed with a central strength member, typically manufactured using a glass-reinforced polymer. The strength member is sufficiently stiff that it dominates the stiffness of the assembly and, because of its central location, ensures that the cable does not preferentially bend in one direction rather than another.

However, the use of a central strength member undesirably increases the size of the cable.

An attempt to produce a cable for installation by blowing without the use of a central strength member is disclosed in EP 0521710, which describes a cable in which 2, 4 or 8 individual

MARKED UP COPY

- 3 -

optical fibres are in touching contact and are encapsulated in an outer layer, typically a UV cured acrylate. Encapsulation of the fibres in a UV cured acrylate results in the individual fibres being restrained from moving relative to each other, and the cable derives its stiffness from this, eliminating the requirement for the central strength member. However, the fact that the fibres are locked together means that when the assembly is bent, the fibres impose a strain on the outer coating of the cable. The larger the diameter of the fibre unit, the greater the tensile stress applied to the outer surface for a given bend radius. Fibre optic cables containing 4 or 8 fibres are found to create such a high load that a phenomenon known as fibre breakout is experienced, and which has a detrimental effect on cable performance.

EP 0521710 discloses a process which produces satisfactory results on cables with fibre counts of 2, 4 and 8 fibres by changing the coating arrangement to ensure that fibres do not break out of the coating, even with larger diameter cables containing 8 fibres. However, it is desirable to manufacture cables having more than 8 fibres, but attempts to manufacture such cables have had difficulty in overcoming the problem of fibre breakout. An attempt to overcome this problem is disclosed in EP 0422764 in which 12 fibres are provided, the fibres being accurately located and locked in position relative to each other by first assembling sets of 4 fibres into a ribbon sub-assembly by edge bonding the 4 fibres to each other, and laying 3 such sub-assemblies on top of each other to form a basic construction which is then encapsulated in an outer layer.

Compact ribbon cable assemblies of this type suffer from the drawback that the surfaces of the ribbons in such cables are smooth, and the ribbons are therefore free to slide relative to each other. In addition, because the fibres are bonded in a flat arrangement, when the cable is bent in a direction which imposes a sideways moment on the flat ribbons, the force generated is high and the central ribbon, which is free to slide between the two outer ribbons, is then forced to break out through the outer acrylate coating, producing micro bending and unacceptable signal losses.

MARKED UP COPY



- 4 -

An attempt to overcome this problem is disclosed in DE 421 1489 by reducing the diameter of the individual optical fibres. An individual fibre is provided with a protective outer layer of 25 microns or less, instead of the 60 micron coating usually applied. This reduces the overall diameter of the individual fibres by approximately 30%, which has the effect of making the assembly smaller and therefore reducing the strain imposed on the coating. However, this arrangement is inconvenient because most commercially available fibres have the same dimensions, and equipment for splicing and terminating fibres is therefore adapted to these standard dimensions. Furthermore, DE 421 1489 describes an arrangement in which adjacent fibre ribbons are offset to reduce the height of the assembly. Such ribbon constructions produce assemblies with a very high preference to bend in one direction, and are therefore not suitable for cables designed for installation by blowing.

US 5787212 discloses an arrangement of 7 fibres of equal diameter in which 6 fibres are disposed in a circular pattern in touching contact with each other and around a central fibre. When the fibres are coated with resin curable by UV radiation, the touching fibres ensure that resin does not enter the spaces between the fibres, which minimises the problem of UV light not adequately penetrating the outer fibres and inadequately curing resin located between the fibres. Uncured resin has the potential to break down and generate agents which may damage the glass fibres, adversely affecting their long-term signal transmitting performance.

Although the arrangement of US 5787212 has very good bending properties, since it is completely balanced with no preferential bending characteristics, and strain imposed on one fibre is partially distributed into the other fibres by virtue of the touching contact, groups of 7 fibres are not used commercially, since fibres are almost always deployed in pairs and it is desirable to manufacture cables with higher fibre counts suitable for installation by blowing. Traditional cables almost exclusively contain 12 fibres or multiples thereof.

Preferred embodiments of the present invention seek to overcome the above disadvantages of the prior art.

MARKED UP COPY

- 5 -

SUMMARY OF THE INVENTION

According to an aspect of the present invention, there is provided a signal transmitting cable comprising a first signal transmitting portion including a plurality of elongate, flexible first signal transmitting members, wherein the first signal transmitting members are surrounded by a first layer of resin material curable by means of radiation such that only the outermost signal transmitting members are in contact with said first layer, and said first signal transmitting members are arranged to form at least three rows, wherein for each said row containing a plurality of said members, said members are arranged such that neighbouring members of a row are in touching contact with each other, each recess formed by neighbouring members of a first said row facing towards a second said row accommodates a respective member of said second row, and said first layer is in touching contact with substantially all of the outermost outward facing surface of the first signal transmitting portion.

By providing a cable in which only the outermost signal transmitting members are in contact with the first layer and recesses formed by neighbouring members of a first row accommodate members of a second row, this provides the advantage of enabling relative movement of the optical fibres to be restrained to give the cable sufficient stiffness, while allowing sufficient axial sliding of the optical fibres relative to each other to minimise the application of stress to the optical fibres when the cable is bent.

The first signal transmitting portion may include 12 said first signal transmitting members arranged in 4 rows having 2, 3, 4 and 3 signal transmitting members respectively.

It is found that a cable having a signal-transmitting portion containing 12 first signal-transmitting members arranged in this manner enables an optical fibre cable having surprisingly and exceptionally favourable bending properties to be constructed.

MARKED UP COPY

- 6 -

The first signal transmitting portion may include 18 said first signal transmitting members arranged in 5 rows having 2, 4, 5, 4 and 3 signal transmitting members respectively.

The first signal transmitting portion may include 24 said first signal transmitting members arranged in 5 rows having 4, 5, 6, 5 and 4 signal transmitting members respectively.

The cable may further comprise a second signal transmitting portion comprising a plurality of elongate, flexible second signal transmitting members arranged around the periphery of said first layer, wherein said external dimensions of said first layer are arranged such that each said second signal transmitting member is in touching contact with two adjacent said second signal transmitting members.

The cable may further comprise a third signal transmitting portion comprising a plurality of elongate, flexible third signal transmitting members arranged outwardly of said second signal transmitting portion.

The second signal transmitting members may be embedded in a second layer.

Said first layer may be formed of resin material cured by means of ultraviolet radiation.

An outer surface of the cable may be modified to facilitate installation into a duct by means of fluid flow.

The outer surface may be provided with ribs.

The outer surface may include at least one anti-static material.

The outer surface may include at least one friction reducing material.

MARKED UP COPY

-7-

The cable may further comprise an outermost layer having an inner periphery longer than the outer periphery of the layer adjacent thereto to enable removal of said outermost layer from the cable.

According to another aspect of the present invention, there is provided a method of forming a signal transmitting cable, the method comprising arranging a plurality of elongate, flexible first signal transmitting members in at least three rows, wherein for each said row containing a plurality of said members, said members are arranged such that neighbouring members of a row are in touching contact with each other, and each recess formed by neighbouring members of a first said row facing towards a second said row accommodates a respective member of a said second row;

surrounding said first signal transmitting members by a first layer of resin material curable by means of radiation such that only the outermost signal transmitting layers are in contact with said first layer, and such that said first layer is in touching contact with substantially all of the outward facing ~~outermost~~ surface of the first signal transmitting portion; and

curing said first layer by means of radiation.

The method may further comprise arranging a plurality of elongate, flexible second signal transmitting members around the periphery of said first layer such that each said second signal transmitting member is in touching contact with two adjacent said second signal transmitting members; and

Fixing said second signal transmitting members in position;

fixing said second signal transmitting members in position relative to said first layer.

The step of fixing said second signal transmitting members in position relative to said first layer may comprise embedding said second signal transmitting members in a second layer.

MARKED UP COPY

-8-

**BRIEF DESCRIPTION OF THE DRAWINGS**

Preferred embodiments of the present invention will now be described, by way of example only and not in any limitative sense, with reference to the accompanying drawings, in which:-

Figure 1 is a schematic cross-sectional view of a cable not forming part of the present invention;

Figure 2 is a schematic cross-sectional view of cable not forming part of the present invention;

Figure 3 is a schematic cross-sectional view of a cable not forming part of the present invention;

Figure 4 is a cross-sectional view of a cable not forming part of the present invention;

Figure 5 is a cross-sectional view of a cable of a first embodiment of the present invention;  
and

Figure 6 illustrates optical attenuation characteristics of the cable of Figure 5 over a wide range of temperatures;

Figure 7 is a cross-sectional view of a cable of a second embodiment of the present invention;

Figure 8 is a cross-sectional view of a cable of a third embodiment of the present invention;

Figure 9 is a cross-sectional view of a cable of a fourth embodiment of the present invention;

Figure 10 is a cross-sectional view of a cable of a fifth embodiment of the present invention;  
and

**MARKED UP COPY**

- 9 -

Figure 11 is a cross-sectional view of a cable of a sixth embodiment of the present invention.

#### DETAILED DESCRIPTION

Referring to Figure 1, a fibre optic cable 2 containing 8 optical fibres is constructed by coating a single central fibre 4 with a UV curable acrylate material 6 to increase the outside diameter of the coated fibre 4 from a standard commercial diameter of 245 microns to 320 microns. The diameter of 320 microns is such that 7 further optical fibres 10, of identical construction to the central fibre 4 and having a standard commercially available diameter of 245 microns, can be arranged around the circumference of the coated central fibre 4 such that each of the 7 fibres 10 is in touching contact with the coated larger diameter central fibre 4 and its two adjacent fibres 10.

The assembly is then coated with an outer layer 12 of UV curable acrylate material, the material being applied in liquid form under low pressure. Because the 7 outer fibres 10 are in contact with the coated central fibre 4 and their 2 respective neighbours 10, none of the outer fibres 10 can move during the coating process, as a result of which the acrylate material of the outer layer 12 does not penetrate into gaps 14 between the coated central fibre 4 and the outer fibres 10. This provides the advantage of avoiding insufficiently cured material in the gaps 14 in the assembly, which could otherwise have a detrimental effect on the optical performance of the cable.

The arrangement shown in Figure 1 also has the advantage over the arrangement of EP 0521710 that the outside diameter of the 7 outer fibres 10 is 800 microns, while that of the prior art is 914 microns. This enables the finished cable to be smaller and the coating of the finished cable to contain less acrylic coating material 12 than in the prior art, the acrylic coating material 12 being generally very expensive. Furthermore, the smaller the outside diameter of the assembly, the lower the strain applied to the outer coating 12 when the cable 2

MARKED UP COPY

-10-

is bent. Also, because of the circular arrangement of the outer fibres 10, the assembly has no preferential bending characteristics, which optimises the cable's performance during installation in a duct by fluid drag.

Referring to Figure 2, in which parts common to the arrangement of Figure 1 are denoted by like reference numerals but increased by 100, a cable 102 is produced by arranging 10 fibres 110 around 2 inner fibres 104 which have been coated with acrylate material 106 to provide an outer diameter of 547 microns. Each of the outer fibres 110 is therefore in touching contact with the inner layer 106 and with two adjacent outer fibres 110, as a result of which UV curable acrylate forming an outer layer 112 does not penetrate into the gaps 114 inwardly of the outer fibres 110.

A further arrangement is shown in Figure 3, in which parts common to the arrangement of Figure 1 are denoted by like reference numerals but increased by 200. The cable 202 has a core 203 identical in construction to the cable 2 of Figure 1, the core 203 having an outer coating 212 of outside diameter of approximately 1010 microns. This enables 16 outer optical fibres 216 to be arranged outwardly of the core 203, such that each of the outer fibres 216 is in contact with its two neighbouring fibres 216. The entire assembly is then provided with an outer coating 218 of a suitable acrylic coating to hold the outer fibres 216 in place.

It is found that as the number of layers of fibres increases, the stiffness of the assembly becomes undesirably high, as a result of which high friction generated by forcing the cable around bends impedes installation of the cable by fluid drag. Furthermore, as the diameter of the cable increases, the problem of fibre breakout occurs. This problem is alleviated by replacing the outer acrylic layer 218 of the arrangement of Figure 3 with a thin flexible lightweight sheath, which allows the outer fibres 216 to move relative to each other. Alternatively, it is possible to encapsulate the outer fibres 216 in outer layer 218 and allow the inner fibres 210 to move relative to each other. The stiffness of the assembly can also be adjusted by selecting suitable grades of acrylic resin.

**MARKED UP COPY**

-11-

A further arrangement is shown in Figure 4, in which parts common to the arrangement of Figure 3 are denoted by like reference numerals but increased by 100. The cable 302 has 8 fibres 304 are encapsulated by a UV curable layer 306 having a diameter of approximately 1010 microns, and 16 outer fibres 316 arranged in a circular formation around the inner fibres 304, in a manner similar to the external fibres 216 Figure 3.

In the arrangement shown in Figure 4, the optical fibres 304 are held in position by means of the UV curable layer 306 so that the UV curable material of the layer 306 does not penetrate into the gaps between the optical fibres 304 and the outermost optical fibres 304 are restrained by the layer from moving axially. It is found that such an arrangement provides surprisingly favourable bending properties, making the cable particularly suitable for installation in a tube by means of blowing.

Exceptionally favourable bending properties are obtained in the case of 12 fibres being arranged as shown in Figure 5, in which parts common to the arrangement of Figure 4 are denoted by like reference numerals but increased by 100. The cable of Figure 5 is constructed in an identical manner to the cable of Figure 4, but the inner fibres 404 of the embodiment of Figure 5 are arranged in rows having 2, 3, 4 and 3 fibres respectively. This cable is found to have bending properties not previously achievable in cables of 12 fibres. For example, the cable of Figure 5 meets the bending performance requirement set out in EP 0521710, although that test is designed primarily for cables containing only 4 or 8 fibres. Advantageous bending properties are also achieved with cables constructed as in the embodiment of Figure 5, but containing 18 fibres 404 arranged in rows of 2, 4, 5, 4 and 3 fibres, and 24 fibres 404 arranged in rows of 4, 5, 6, 5 and 4 fibres.

Referring now to Figure 6, the signal loss over a wide temperature range associated with cables of the embodiment of Figure 5 is shown. The different curves show signal attenuation in the individual fibres 404 of the cable of Figure 5. It can be seen that the cable can withstand exposure to a wide temperature range. This is a surprising result. Prior art cables as described in EP0157610 incorporating polyethylene outer layers display poor optical performance below

MARKED UP COPY



-12-

approximately B20 C. This is usually attributed to a change of phase in polyethylene at around this temperature and for this reason polyethylene is not normally selected for the tight jacketing of fibre optic elements.

The cable of Figure 7 is constructed in a similar fashion to the cable of Figure 5, with the inner fibres 504 of the embodiment of Figure 7 being arranged in rows having 2, 3, 4 and 3 fibres respectively, and being surrounded by a UV curable layer 506. However, the cable of Figure 7 additionally comprises an outermost layer 510 having an inner periphery longer than the outer periphery of the layer 506.

The cable of Figure 8 is constructed in a similar fashion to the cable of Figure 5, with the inner fibres 604 of the embodiment of Figure 8 being arranged in rows having 2, 3, 4 and 3 fibres respectively, and being surrounded by a UV curable layer 606. However, the layer 606 is surrounded by an outermost layer 610 which is provided with ribs 611.

The cable of Figure 9 is constructed in a similar fashion to the cable of Figure 5, with the inner fibres 704 of the embodiment of Figure 9 being arranged in rows having 2, 3, 4 and 3 fibres respectively, and being surrounded by a UV curable layer 706. However, the cable further comprises a second signal transmitting portion comprising a plurality of optical fibres 708 arranged around the periphery of the layer 706, wherein the external dimensions of the layer 706 are arranged such that each optical fibre 708 is in touching contact with two adjacent optical fibres 708. The optical fibres 708 are surrounded by a second UV curable layer 711, and the cable further comprises a third signal transmitting portion comprising a plurality of optical fibres 712 arranged outwardly of the second signal transmitting portion.

The cable of Figure 10 is constructed in a similar fashion to the cable of Figure 5, with the fibres 804 being surrounded by a UV curable layer 806. However, the fibres 804 of the embodiment of Figure 10 are arranged in rows having 4, 5, 6, 5 and 4 fibres respectively.

**MARKED UP COPY**

-13-

The cable of Figure 11 is constructed in a similar fashion to the cable of Figure 5, with the fibres 904 being surrounded by a UV curable layer 906. However, the fibres 904 of the embodiment of Figure 11 are arranged in rows having 3, 4, 5, 4 and 2 fibres respectively.

It will be appreciated by persons skilled in the art that the above embodiments have been described by way of example only, and not in any limitative sense, and that various alterations and modifications are possible without departure from the scope of the invention as defined by the appended claims.

MARKED UP COPY